


AquaClean Mera Comfort WC complete solution, wall-hung WC

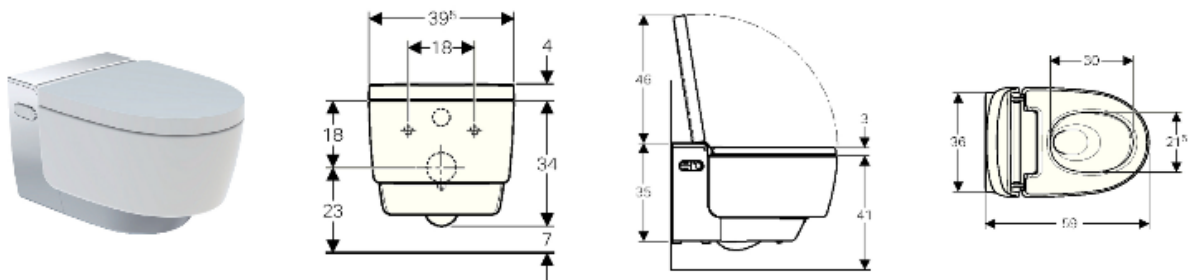

Application Purposes

- For convenient and odourless toilet use
- For gently cleaning the anal and vaginal areas with water

Characteristics

- Hybrid hot water system with continuous flow heater and storage water heater
- Anal shower with double-nozzle WhirlSpray shower technology
- Separate Lady shower nozzle in protected park position
- Adjustable shower water temperature
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and post-rinsing of the spray nozzle with fresh water
- Descaling programme
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Washdown WC with dirt-repellent ceramic surface
- User detection
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Dryer can be activated
- Dryer arm can be extended
- Adjustable dryer temperature
- WC seat with rapid heating function
- Adjustable temperature of the WC-seat heating
- WC seat and WC lid with SoftClosing
- WC lid with SoftOpening
- Touchless opening and closing of the WC lid
- Activation of the orientation light when approaching
- Orientation light can be set in seven colours
- Functions and settings via remote control
- Four user profiles can be programmed
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-wire sheathed cable, on the right side, hidden behind the WC ceramic
- Water supply connection, external on the left, accessories possible
- External mains connection, with power outlet on the right possible
- Approval in accordance with EN 1717 / EN 13077

Technical Data

Protection degree	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption	2000 W
Power consumption standby	≤ 0.5 W
Flow pressure	0.5-10 bar
Flow pressure	50-1000 kPa
Minimum flow pressure	0.5 bar
Minimum flow pressure	50 kPa
Operating temperature	5-40 °C
Water temperature, adjustment range	34-40 °C
Calculated flow rate	0.03 l/s
Spray time	30-50 s
Maximum load WC seat	150 kg

Scope of delivery

- Water supply connection set for Geberit Sigma concealed cistern 12 cm and Geberit Omega concealed cistern 12 cm
- Female socket for mains connection
- Spray shield
- Descaling agent, 125 ml
- Cleaning set
- Connection set for WC, ø 90 mm
- Remote control with wall-mounted case and battery CR2032
- Fastening material

Order Table

Art. no.	Colour / Surface
146.210.11.1	white alpine
146.210.21.1	bright chrome-plated

Accessories

Accessory overview: Water supply and electrical connection for Geberit concealed cisterns

DUOFIX		Duofix Sigma H112, 12 cm	Duofix Sigma H112, 8 cm	Duofix Kappa H82, 15 cm	Duofix Omega H112, 12 cm	Duofix Omega H82/98, 12 cm	Furniture Frame H79
GAC Mera Comfort	Concealed	Included	242.413.00.1	147.026.00.1	Included	147.026.00.1	N/A
	Exposed	147.030.XX.1	N/A	147.032.XX.1	N/A	N/A	242.355.00.1

MONOLITH		Monolith H101 Wall-hung	Monolith H114 Wall-hung	Monolith H114 Wall-hung for GAC	Monolith H101 Floorstanding	Monolith H114 Floorstanding
GAC Mera Comfort	Concealed	Included	Included	N/A	N/A	N/A
	Exposed	N/A	N/A	N/A	N/A	N/A

CONCEALED CISTERNS		Sigma concealed cistern 12cm	Sigma concealed cistern 8cm	Kappa concealed cistern 15cm	Omega H112 concealed cistern 12cm	Omega H82/98 concealed cistern 12cm	Low height furniture cistern
GAC Mera Comfort	Concealed	N/A	N/A	N/A	N/A	N/A	N/A
	Exposed	147.033.xx.1	147.033.xx.1	147.033.xx.1	147.033.xx.1	147.033.xx.1	147.033.xx.1

Logistic Data

Art. no.	PU1[Pc.]	PU4[Pc.]	PU1 - L x W x H[mm]	VP4 - L x W x H[mm]	Gross weight[kg]	Net weight[kg]
146.210.11.1	1	4	600 x 800 x 550	1200 x 800 x 1230	42.5	40
146.210.21.1	1	4	600 x 800 x 550	1200 x 800 x 1230	42.5	40